



Support Wifi



Aluminum / Metal bezel




Properly DVD package benefits



VESA Mount

The rugged industrial panel pc

Perform powerfully & perfectly for you!




HEISEI



www.heisei.com.tw

SPECIFICATIONS

Model Name	P-Open C
Main Board	
M/B No.	Heisei BI-945IX
CPU	Intel socket 478 for Core™ 2 Duo / Celeron® M processor up to FSB 667MHz
Chipset	Intel 945GME + ICH7M Chipset
Memory	2 x 240 Pin DIMM socket up to 4GB DDR2 533/667
Graphics	- Integrated with Intel Graphics Media Accelerator (GMA950), shared system memory max. 224MB - Support Dual Display Mirroring/Multiple Mode
Network	Dual Realtek RTL8111B 10/100/1000 Base-T fast Ethernet 802.11g Wireless LAN (optional)
Power Input	180W ATX power supply for AC 100~240VAC @ 50~60Hz
Dual Display	Support Dual Display Mirroring/Multiple Mode
Audio	Realtek AC97 Codec ALC203 (Line-Out, Mic.)
OS	Windows 2000/XP/XPE/Vista
Display	
TFT LCD Size	12" / 15" / 17" / 19" TFT LCD
Resolution	12.1" : 800 x 600, 15" : 1024 x 768, 17"/19" : 1280 x 1024
Brightness	12" : 800 x 600 / 400nits 15" : 1024 x 768 / 250nits 17" : 1280 x 1024 / 300nits 19" : 1280 x 1024 / 300nits
Touch Screen	5-wire Analog resistive (ELO / E-Turbo)
Storage	
HDD	1 x 3.5" hard disk drive bay
FDD	1 x slim floppy disk drive bay
CD-ROM	1 x slim optical drive bay
I/O Ports	
USB	8 x USB 2.0 (4 x rear, 4 x onboard pin header)
Serial Ports	4 x RS232 DB-9 (+5V/12V Selectable on pin 9), COM 1 is reserved for touch panel, COM2 : Default RS232, RS422/485 optional
LAN	2 x RJ-45 interface
Audio	1 x Mic-in / 1 x Line-out
Parallel	1 x Parallel (SPP/EPP/ECP)
VGA	1 x DB-15 VGA interface for dual display
Bus Expansion	1 x PCI Slot (Support 2 x PCI Card)
Digital I/O	4-in / 4-out (DB9 female)
Environment	
Compliance	CE, FCC, RoHS, Heavy-Duty Steel (Aluminum bezel support IP65)
Operating Temperature	0 ~ 40°C
Storage Temperature	-20 ~ 60°C
Humidity	10% ~ 90%
Physical Dimensions	
Front Bezel	Aluminum bezel black Big metal bezel (option), Small metal bezel (option)
Weight	12.1" : 8.4 Kg 15" : 9.4 Kg 17" : 11.5 Kg 19" : 13.6 Kg
Dimension	12.1" : 448(W) x 371(H) x 100(D) mm 15" : 448(W) x 371(H) x 100(D) mm 17" : 485.5(W) x 418(H) x 103(D) mm 19" : 524(W) x 448.5(H) x 106(D) mm

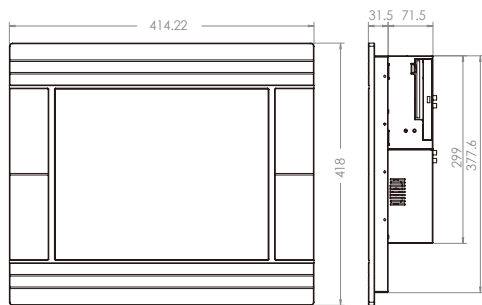

Ex: P-Open 170 Series

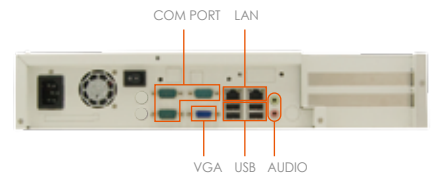

Ex: P-Open C



Heisei Taiwan Headquarter

Phone: Sales: 886-2-29152150
 Fax: 886-2-29152157
 Email: marketing@heisei.com.tw
 Address: 3F, No. 5, Alley 8, Lane 45, Pao-Hsin Rd.,
 Hsin-Tien Dist., New Taipei City 23145,
 Taiwan (R.O.C.)

Heisei U.S.A. Service Center

Phone: 1-714-8813249
 Fax: 1-714-5332168
 Email: Vincent.liu@heisei.com.tw
 Address: 421 N. Brookhurst St. Suite 224
 Anaheim, CA 92801

Heisei Systems Europe

Phone: 31-183-640145
 Fax: 31-183-640366
 Email: info@heisei-systems.eu
 Address: Vaart 11, 4206 CC
 Gorinchem, The Netherlands.