



Customer Display



Wide Range View Angle -10°~85°



Integrated MSR



Choose Your Own Brand Color

The first expandable terminal, ComPOS

Every user should enjoy operating!




HEISEI




www.heisei.com.tw

Specification

Model Name	ComPOS C150F/C120F	ComPOS D120/D150
Main Board		
M/B No.	Heisei BI-940IX	Heisei BI-946ID
CPU	Socket 478 for Core Duo/Core 2 Duo/65nm Celeron M processor up to FSB 667MHz	Onboard Intel® Atom N270 (1.6GHZ) processor
Memory	2 x 240 Pin DIMM up to 4GB DDR2 667	2 x 240 Pin DIMM up to 2GB DDR2 533
Chipset	Intel 945GME + ICH7M	Intel i82945GSE + ICH7M
Graphics	Intel 945GME integrated GMA950 shared system memory max 128MB	Integrated GMA950 with shared system memory max224MB
	Support Dual Display Mirroring/Multiple Mode	
Network	10/100/1000 Base-T fast Ethernet	Dual 10/100/1000 Base-T fast Ethernet
WLAN	802.11g Wireless LAN (option)	
Audio	Realtek AC97 Audio Codec ALC203 (line-out/mic)	VIA HD Audio codec VT1708A with Audio Amplifier
Power Supply	DC 12V power input	DC-IN 12V power input, max.80W
OS	Windows 2000/ XP Embedded/ Vista / WEPOS / POSReady 2009	
Key Lock	Front I/O key lock	
LED	Power, LAN and HDD	
Display		
LCD	ComPOS 120 series : 12.1" / TFTComPOS 150 series : 15" TFT	
Max. Resolution	ComPOS 120 series : 800 x 600 / ComPOS 150 series : 1024 x 768	
Brightness	ComPOS 120 series: 400 cd/m ² / ComPOS 150 series: 250 cd/m ²	
Touch Screen	5-wire Analog resistive (ELO or E-Turbo)	5-wire Analog resistive (HIGSTEC or ELO)
Storage		
HDD	1 x 2.5" 80GB SATA II hard drive	1 x 2.5" 160GB SATA II hard drive
Card Reader	1 x slim type 4 in 1 memory card reader drive (option)	
CF	1 x Compact Flash type I/II socket (optional)	
I/O Ports		
USB	8 x USB 2.0 (2 x rear IO, 2x left side, 4 x on board pin header)	8 x USB 2.0 (4 x rear IO, 2 x left side IO, 2 x on board pin header)
Serial Ports	3 x DB-9 (COM 2, 3, 4) and COM 1 support touch screen with adjustable 5V/12V on pin9	
LAN	1 x RJ-45 interface	2 x RJ-45 interface
PS/2	2 x PS/ 2 ports (for keyboard and mouse)	
Audio	1 x mic in / 1 x line-out	
VGA	1 x DB-15 VGA interface for dual display	
Modem	1 x RJ-11 Phone Jack Modem	
Printer	Option	
Cash Drawer Port	1 x RJ-12 for DC 12V device	
Dimensions and Weight		
Display Tilt Adjustment	10°~85°	
Weight	12": 7.1 kgw 15": 8.1 kgw	12": 6.2 kgw 15": 7.8 kgw
Dimension	ComPOS 120 series: 345(W) x 332(D) x 310 (H) mm ComPOS 150 series: 410(W) x 355(D) x 345 (H) mm	
Environmental		
EMC & Safety	CE, FCC	
Operating Temperature	0 ~ 40°C	
Storage Temperature	-20 ~ 60°C	
Propper Humidity	10% ~ 90%	
Optional Items		
Memory	DDR2-533 512MB/1GB/2GB (240Pin)	
HDD	80GB (2.5" SATA, 5400RPM)	160GB (2.5" SATA2, 5400RPM)
Compact Flash	Compact Flash Type I / II Socket	
Memory Card Reader	Slim type 4 in 1 memory card reader	
WLAN	802.11g Wireless LAN module	
Modem	56K modem	
MSR	Track 1/2/3 Magnetic Stripe Reader	
Customer Display	VFD pole display	



Ex: ComPOS 150 Series

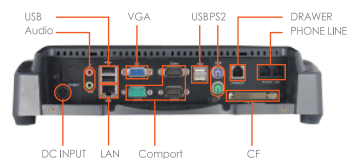

Ex: ComPOS C



Heisei Taiwan Headquarter

Phone: Sales: 886-2-29152150
 Fax: 886-2-29152157
 Email: marketing@heisei.com.tw
 Address: 3F, No. 5, Alley 8, Lane 45, Pao-Hsin Road,
 Hsin-Tien City, Taipei Hsien 231, Taiwan, R.O.C.

Heisei U.S.A. Service Center

Phone: 1-714-8813249
 Fax: 1-714-5332168
 Email: Vincent.liu@heisei.com.tw
 Address: 421 N. Brookhurst St. Suite 224
 Anaheim, CA 92801

Heisei Systems Europe

Phone: 31-183-640145
 Fax: 31-183-640366
 Email: info@heisei-systems.eu
 Address: Vaart 11, 4206 CC
 Gorinchem, The Netherlands.